


FAA/FCC CHIMNEY & STACK LIGHTING REQUIREMENTS




3195 Vickery Rd. North Syracuse NY 13212 | (315) 699 4400 | Unimar.com

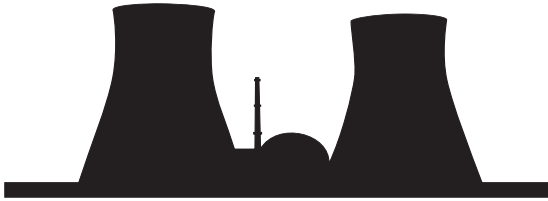

NOTE: Information is provided to assist in your product selection based on AC 70/7460-1K and AC 150/5345-43F Advisory Circular. Your application may demand special lighting requirements. **LED fixtures are ideal for solid structure applications.**


Number of Lights Per Level/ Structure Diameter

(20' or less)
Diameter




3 lights / level

(21' - 100')
Diameter



4 lights / level


(100' - 200')
Diameter

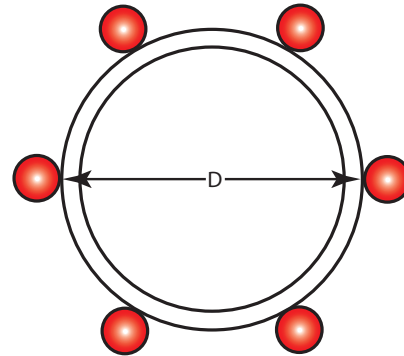

6 lights / level

NOTE: Number of lights per level is the minimum

Number and Types of Lighting Levels/ Height

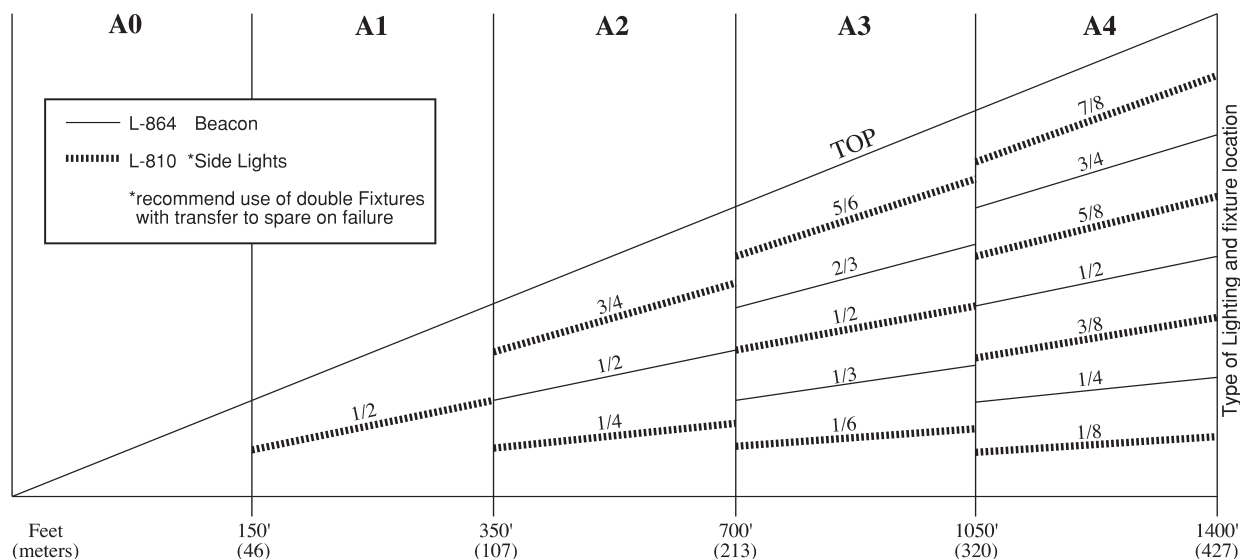

NOTE: Lowest level of lights must be raised above the height of adjacent structures. If your structure is not represented, allow us to assist you with selecting the proper products for your specific structure. Example: For structure "A1", one L-864 beacon is required at top and L-810 sidelights are to be mounted at 1/2 tower height.